


# Series 16SVP-06

## Single Axis Valve Gate Nozzle

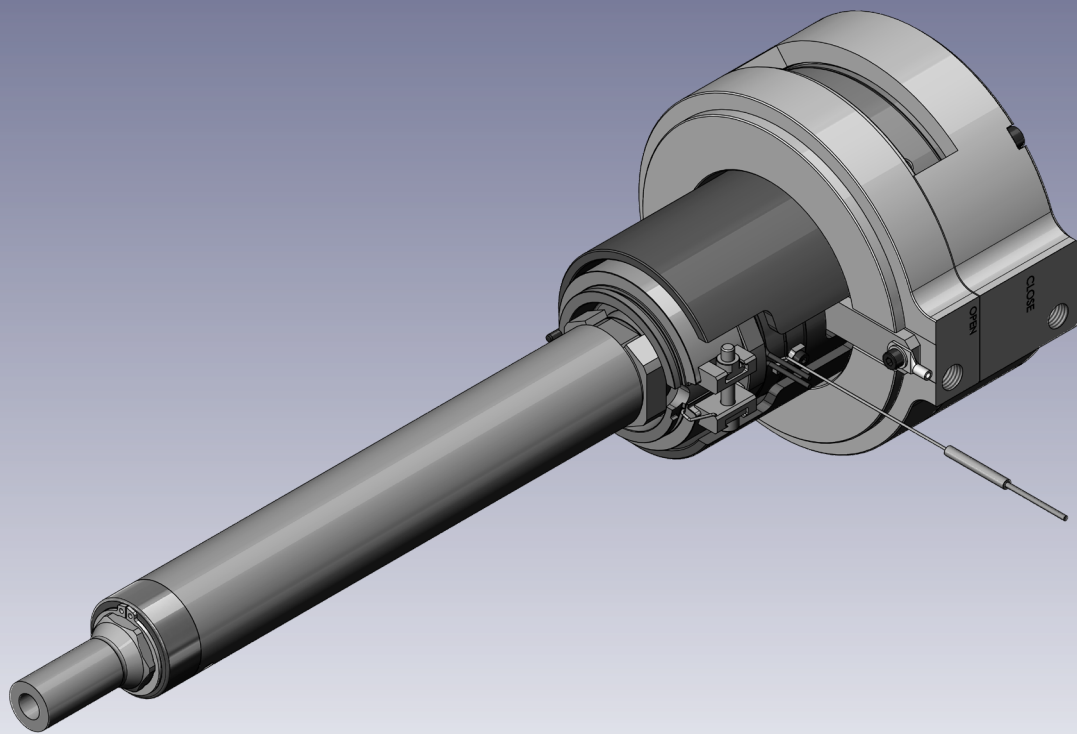


Stabilize your Process

CAT-01-0096\_EN-Rev01

EN 10 / 2021

**16SVP-06 Single Axis Valve Gate Nozzle, pneumatic****Product Description - Technical Data**

Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

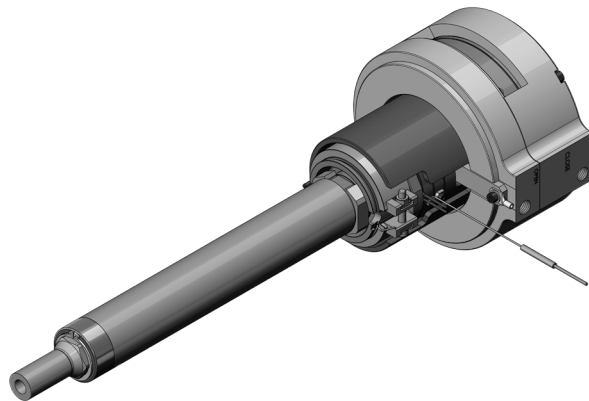

<b>Valve Pin Operation</b>	
Operation medium	pneumatic
Pressure range	5 - 10 bar (72.5 - 145 psi)
Flowrate	10 l/min / 5 bar (72.5 psi)
Reaction time	~1,2 s
Valve pin stroke:	14 mm
Adjustment	± 1.5 mm Via adjustment threads from outside.
Closing force	3579 N / 6 bar (87 psi)
Opening force	3579 N / 6 bar (87 psi)
Connection	M12x1,5 (8-L)
<b>Valve pin</b>	
Valve pin diameter	Ø 8 mm
Attachment	Quick coupling, anti-rotation
<b>Cooling</b>	
Without being directly cooled the single axis valve gate nozzles 16SVP-06 can be used up to a mold temperature of 80 °C (176 °F).	
<b>Heating Power</b>	
externally heated, 230 V AC	The numbering of the heating zones starts at the nozzle tip and ends at the nozzle head.
Zone 1 (From a nozzle length of 90 mm)	285 - 450 Watt
Zone 2 (From a nozzle length of 225 mm)	735 - 785 Watt
Head	800 plus 680 Watt
<b>Thermocouple</b>	
EN 60584 Fe-CuNi 0 = Typ J; NiCr-Ni = Typ K	
The heater & thermocouple are replaceable.	
<b>Application</b>	
For all usual thermoplastics Max. shot weight per nozzle (g): → 1500 (low viscosity)	

**NOTICE**


To ensure long life and continued flawless operation of the actuator, we recommend using filtered compressed air.



16SVP-06 Single Axis Valve Gate Nozzle, pneumatic

Product Description - Dimensions - Heater Zones Power

Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

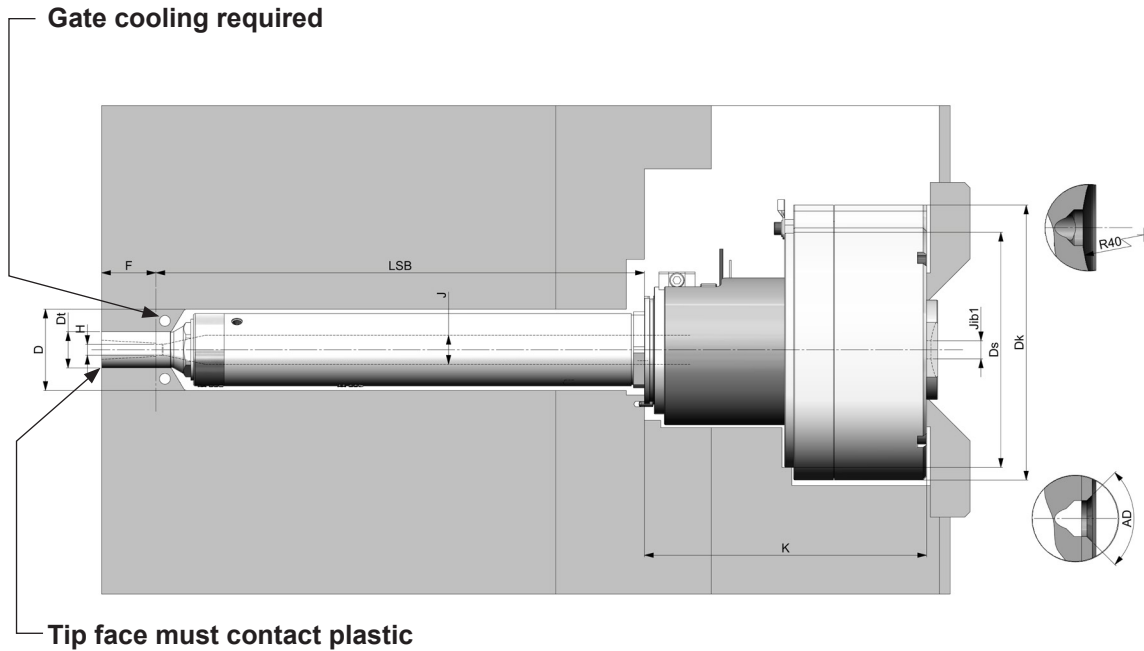

J	Flow bore	Ø 16 <sup>1)</sup>	H	Gate orifice	see page 7
Jib1	Flow bore inlet bushing	Ø 10	K	Head height	156
LSB	Nozzle length	50...395 <sup>2)</sup>	Dk	Head diameter	Ø 144
F	Tip extension	see page 7	Ds	Diameter of head centering	Ø 130
D	Cutout	Ø 45	R	Nozzle contact radius	0...40
Dt	Tip Ø	see page 7	AD	Nozzle contact angle	90°...120°

- 1) Standard flow bore value = Ø 16  
consult Synventive for custom dimensions Ø 14, Ø 18
- 2) Standard lengths shown, consult Synventive for custom lengths.

LSB (mm) Custom lengths	Nozzle Heater zones power <sup>3)</sup> (Watt)		Adapter Head	Head Bottom
	Power 1	Power 2	Power	Power
90 ... < 100	285W		800W	680W
100 ... < 125	305W		800W	680W
125 ... < 150	380W		800W	680W
150 ... < 175	395W		800W	680W
175 ... < 200	410W		800W	680W
200 ... < 225	430W		800W	680W
225 ... < 250	450W		800W	680W
250 ... < 275	285W	450W	800W	680W
275 ... < 300	285W	500W	800W	680W


- 3) The numbering of the heating zones starts at the nozzle tip and ends at the nozzle head.





Cutout in Mold Plate for Nozzle and Connections

Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

Cutout for the Nozzle

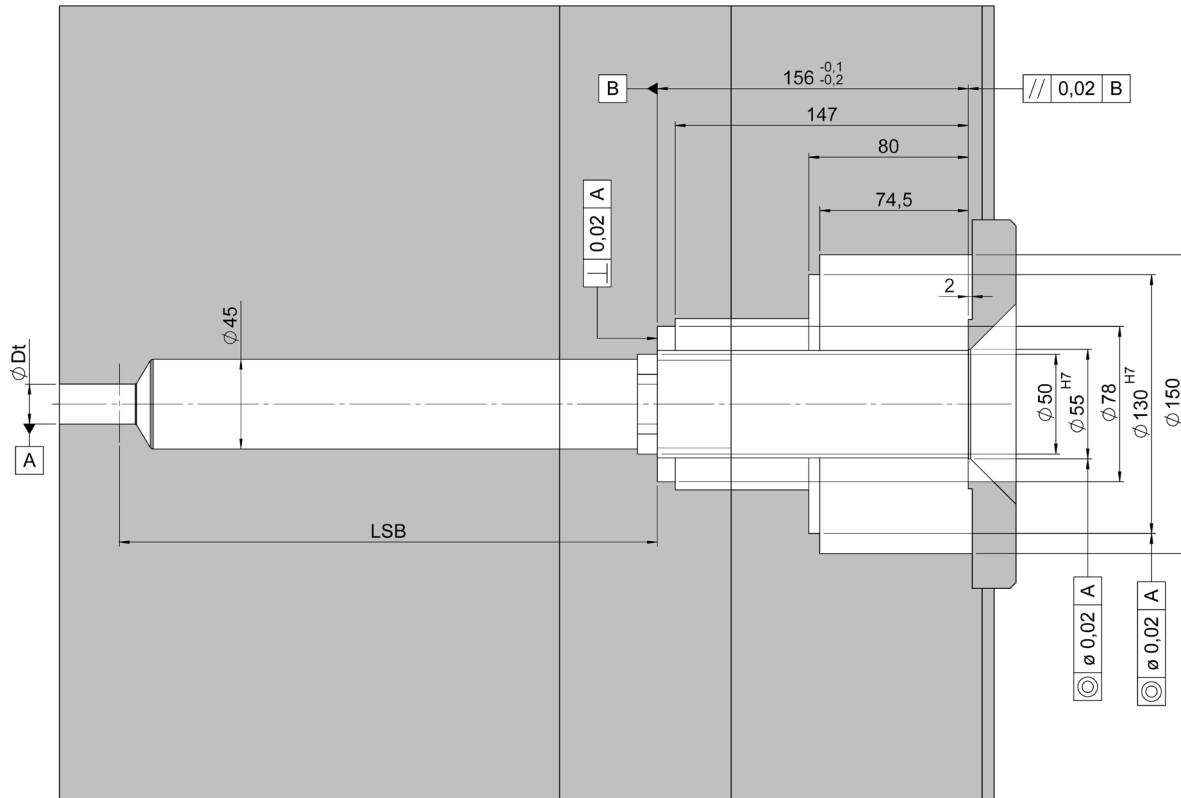

Cutout for Connections (Electrical power and Thermocouple)

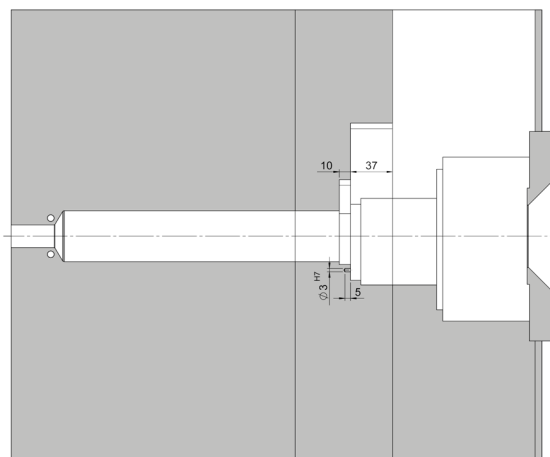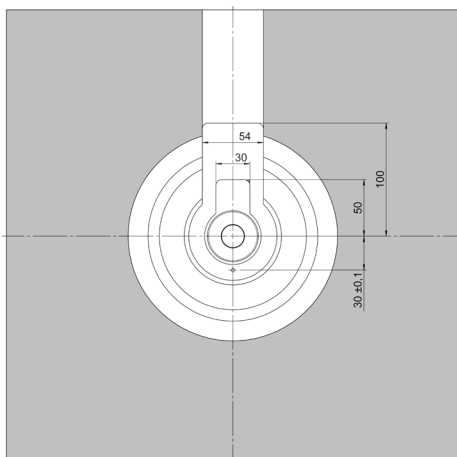

General tolerances: DIN ISO 2768-mK

Surfaces:  $\sqrt{Ra 3.2}$  ( $\sqrt{Ra 1.6}$   $\sqrt{Ra 0.8}$ )

Values of the dimension LSB can be found in the data sheet on page 3.




## Product Description - Cooling Unit CU16SVP01



Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

**CU16SVP01 mounted on  
Single Axis Valve Gate  
Nozzle 16SVP-06**

CU16SVP01 Technical Data	
Medium	Cooling water
Flow rate	4 l/min
Pressure	max. 8 bar (116 psi)
Temperature	30...60 °C (86 - 140 °F)
Connections	M14x1.5

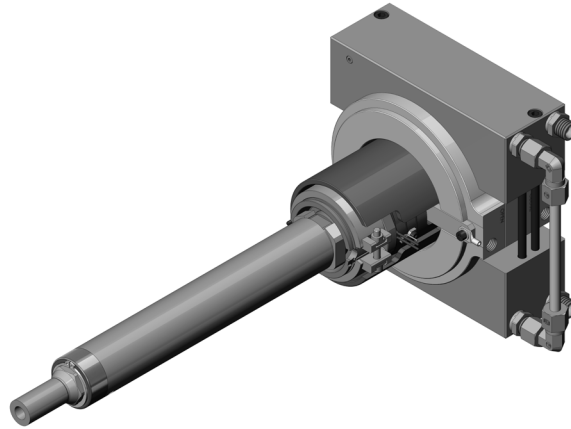**Parts List**

Pos.	Qty.	Description/ Part Number
01	2	Cooling Sleeve / CU16SVP01
02	1	Connecting Tube / CU16SVPCT01
03	2	Sealing Plug / Z942/6
04	4	Straight Coupling / GE08LMEDVITOMDCF
05	2	Elbow Coupling / EW08LVITOMDCF
06	2	Cutting Ring / PSR08LX
07	2	Nut / M08LCFX
08	3	Hexagon Socket Cap Screw / DIN912-M6x110-12.9

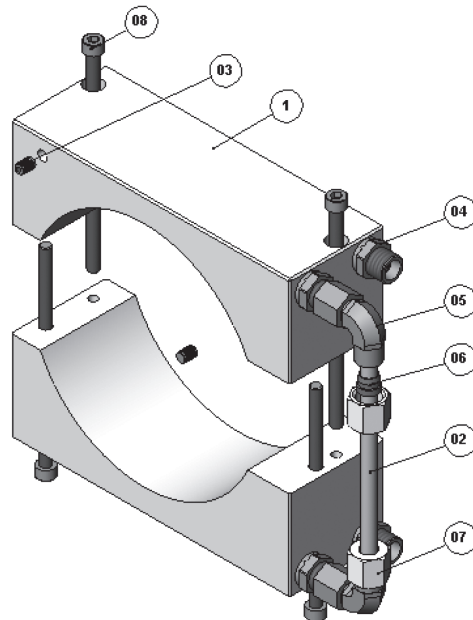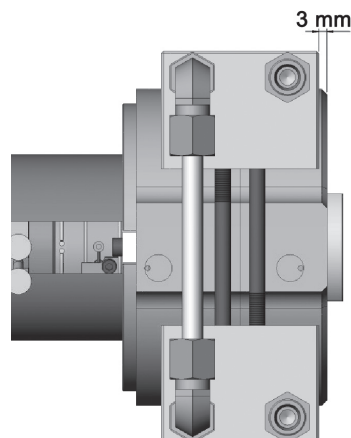**Position of the cooling unit  
on the Single Axis Valve  
Gate Nozzle**







Nozzle Tip Styles

Illustrations simplified, schematically drawn and not to scale. All dimensions in mm  
 H = Gate orifice diameter, F = Tip extension, Dt = Tip Diameter, Mod = Modifiable

**VSP** Valve Gate - Straight Pin - Plunged Through

Tip Style		Description	Application range	Dt = Ø20 F = 0, 30, Mod	
				H=5.0	H=6.0
	<b>VSP</b>	Universal	for all common plastics	✓	✓
	<b>VSP-SC</b>	Seal cap	for color change	✓	✓

**VSW** Valve Gate - Straight Pin - Blind

Tip Style		Description	Application range	Dt = Ø22	
				H=4.0	H=5.0
	<b>VSW</b>	Universal	for all common plastics	(✓)	✓
	<b>VSW-SC</b>	Seal cap	for color change	(✓)	✓

✓ Preferred

(✓) Available



✗ Not Available



Nozzle Tip Cutout Dimensions

Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.  
 Dimensions for reference only. Reference system drawing for complete dimensions prior to machining gate detail in mold.

VSW - Nozzle tip cutout dimensions

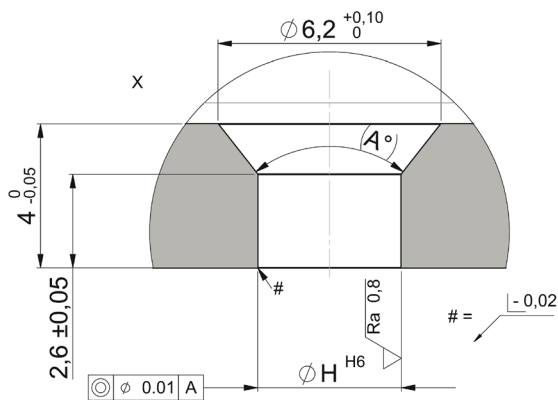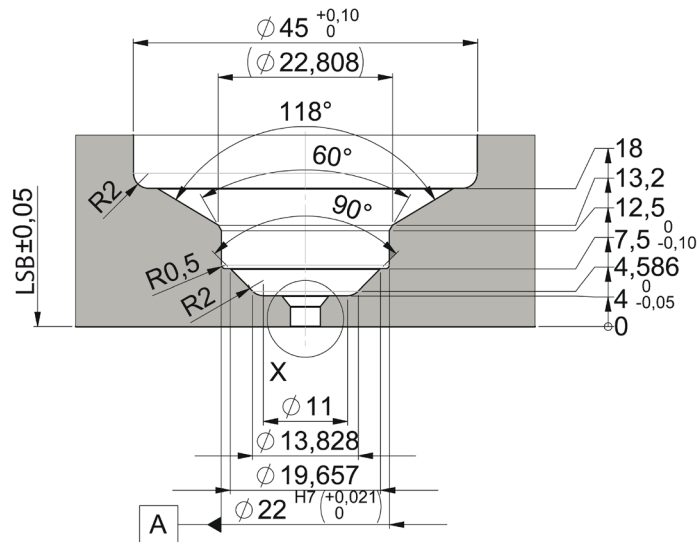

ØH H6	(A°)
4,0 <sup>+0,008</sup> / <sub>0</sub>	76,31
5,0 <sup>+0,008</sup> / <sub>0</sub>	46,4

1. At the area of the nozzle gate replaceable, hardened (52 +2/-1HRC) inserts are recommended by Synventive.
2. Synventive recommends that the gate area geometry is manufactured by grinding and not EDM with a surface quality of  $\sqrt{Ra0,8}$






Nozzle Tip Cutout Dimensions

Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.  
Dimensions for reference only. Reference system drawing for complete dimensions prior to machining gate detail in mold.

VSP - Nozzle tip cutout dimensions

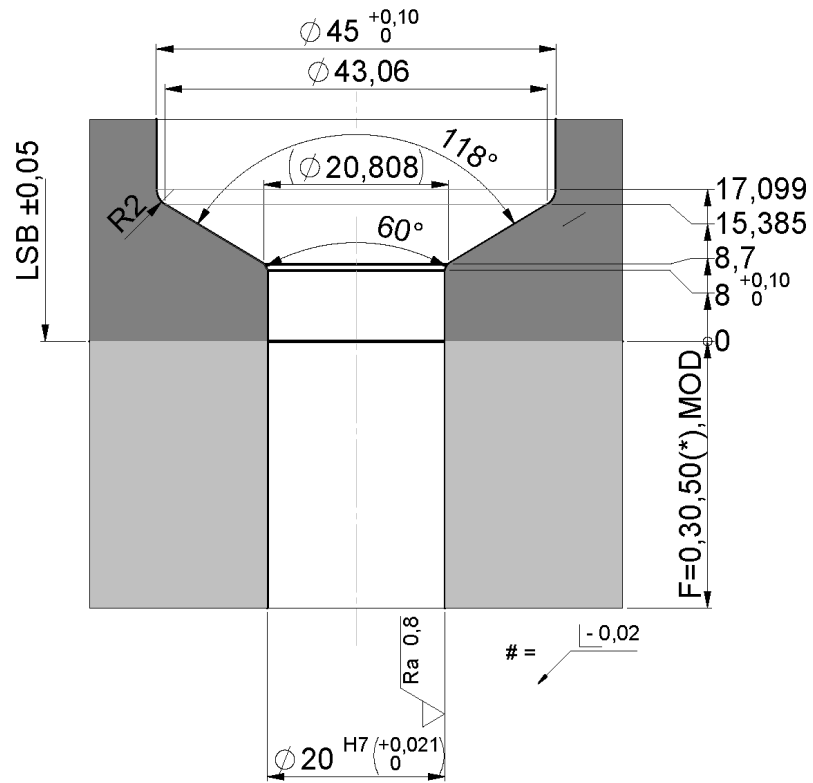

**North America**

Synventive Molding Solutions Inc.  
10 Centennial Drive  
Peabody, MA 01960  
Tel.: +1 978 750 8065  
Fax: +1 978 646 3600  
Email: [info@synventive.com](mailto:info@synventive.com)

**Europe**

Synventive Molding Solutions GmbH  
Heimrodstraße 10  
Postfach 3123  
64625 Bensheim  
Tel. :+49 (0)6251 9332-0  
Fax :+49 (0)6251 9332-90  
Email: [infohrde@synventive.com](mailto:infohrde@synventive.com)

**Asia**

Synventive Molding Solutions (Suzhou) Co. Ltd.  
12B Gang Tian Industrial Square  
Suzhou Industrial Park, China 215021  
Tel.: +86 512 6283 8870  
Fax: +86 512 6283 8890  
Email: [infohrcn@synventive.com](mailto:infohrcn@synventive.com)

